

**Optimization of Design Parameters for Leaf Spring by  
Taguchi Technique**

<https://doi.org/10.32792/utq/utj/vol12/3/12>

**Asst. Prof Dr. Mohammed M. Hamadi**

**Department of Production Engineering and Metallurgy,**

**University Technology/ Baghdad**

**Email: [aya\\_drhmm@yahoo.com](mailto:aya_drhmm@yahoo.com)**

**Haider Sami Salman**

**Production and Metallurgy Engineering**

**Department/University of Technology/Baghdad**

**Email: [masterh1983@gmail.com](mailto:masterh1983@gmail.com)**

**ABSTRACT**

Spring design in vehicles is one of the basic requirements in the system of suspension as by ensuring the proper design, the necessary comfort for passengers can be obtained. Thus, the car's stability on the road and in different places (the flat roads, winding roads and mountain roads) will be achieved. Given this importance, there are many factors that affect the design of springs (leaf springs). This research includes the study of three factors considered namely :( thickness, length and step) of springs. Taguchi experiment is used in determining the best among the tests performed. Then each factor was taken individually in control to get the design parameters for the leaf spring.

Taguchi technique is applied in the design process of the three factors and mix levels to choose the optimal level for each factor that gives nominal of suitable displacement, stress and load. Optimal levels that have been achieved for case study of leaf spring of a total thickness of (12) mm were:

- Spring work in regions with high bumps.
- Spring work in flat areas and highways.
- Spring work in the middle regions (winding roads within cities).
- Applied cases studied were NISSAN, SCANIA and MAN automobiles to apply this rule and compare the actual design specifications of these automobiles. The output results showed a complete compatibility between these cases.

***University of Thi-Qar Journal Vol.12 No.3 SEP 2017***

***Web Site: <https://jutq.utq.edu.iq/index.php/main>***

***Email: [journal@jutq.utq.edu.iq](mailto:journal@jutq.utq.edu.iq)***

**Keywords:** Leaf spring, laminated spring, Taguchi Method, S/N.

Nomenclature		
1	ANOVA	Analysis of variance.
2	F.E.M	Finite element method.
3	MSD	Mean squared deviation

## تحقيق امثلية تصميم العوامل لنايى ورقى باسخدام تقنية تاجوشى

### الخلاصة

يعتبر تصميم النوايى فى المركبات ،احدى المتطلبات الاساسية فى منظومة التعليق اذ من خلال ضمان التصميم الملائم يمكن الحصول على الراحة اللازمة للراكب وبالتالي الحصول على استقرار السيارة على الطريق وفى اماكن مختلفة (الطرق المستوية ،الطرق المتعرجة ،الطرق الجبلية). ونظرا لهذه الاهمية ،هنالك العديد من العوامل المؤثرة على تصميم النوايى (النابض الورقى) ،تم فى هذا البحث دراسة ثلاثة عوامل من هذه العوامل (السمك ،الطول والتدرج). كما تم فى هذا البحث استخدام تقنيات التمثيل الاحصائى المتمثلة بطريقة تاجوشى فى تحديد التجربة الافضل من بين التجارب التى اجريت ، ثم فصل كل عامل سيطرة بمفرده وذلك للحصول على عوامل التصميم للنابض الورقى.

تم تطبيق نظرية تاجوشى فى عملية التصميم لثلاثة عوامل (عاملين بأربعة مستويات والعامل الثالث بمستويين) لاختيار المستوى المثالى لكل عامل يعطى معدل ازاحة مناسب. المستويات المثالية التى تم تحقيقها لدراسة حالة النابض الورقى ذو سمك كلى (12) ملم هى:

- ❖ نابض يعمل فى المناطق ذات المطبات العالية (قوة قليلة وازاحة عالية).
- ❖ نابض يعمل فى المناطق المستوية والطرق السريعة.
- ❖ نابض يعمل فى المناطق المتوسطة (الطرق المتعرجة داخل المدن) .
- ❖ تم تطبيق الدراسة على العجلات نيسان ،سكانيا و مان لغرض مقارنة نتائج الحسابات مع الخواص التصميمية الحقيقية لهذه العجلات. النتائج اظهرت تطابق تام بين هاتين الحالتين.

### 1. Introduction:

One of the basic systems in all types of heavy vehicles and transport automobiles is the suspension system. It is the system which contains springs to minimize the sudden impact on the vehicles body structure and passenger group. Therefore, in this study has been done the best model study for the leaf springs used in heavy vehicles and various kinds of automobiles. The basic element in valuation of this model is considered as the force quantity which can be endured in all kinds of work conditions. The second element is the bend quantity given by these springs, in order to minimize the impact on

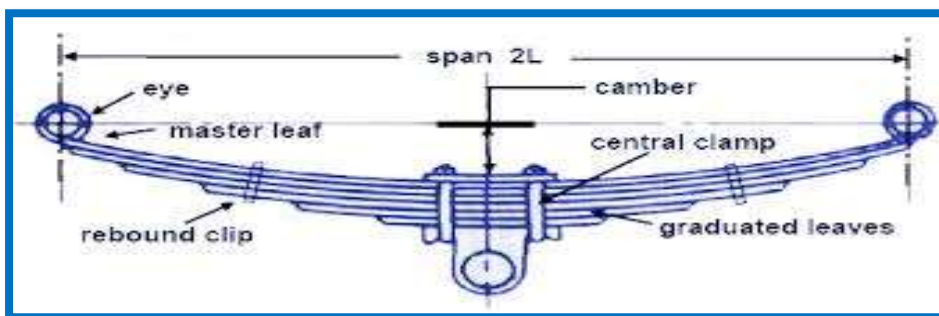


Figure (1). Leaf spring

the passenger, goods and vehicles structure. There are two elements work together. It is not allowed to leave one of them or disvalue its importance. Thus a detailed study has been carried out on two parameters to reach to the complied state between the basic elements that have to be applied in these models. . The leaf spring consists of a number of flat plates (known as leaves) of varying lengths, as shown in Figure (1). These are mostly used in automobiles. [1].

## **2. Literature survey**

**Achamyelah A Kassie.et al (2014)[2]** Reduced the weight and increased strength of products that are high research demands in the world, composite materials are getting to be up to the mark of satisfying these demands. In this paper reducing weight of vehicles by 68.14% and increasing the strength of their spare parts is considered. A mono composite leaf spring for the vehicular suspension system was designed using E-Glass/Epoxy with the objective of minimizing weight of the leaf spring. And it is shown that the resulting design stresses are much below the strength properties of the material satisfying the maximum stress failure criterion. The deflection of the leaf spring along its transverse direction, which is very small compared to the considered maximum deflection.

**Mouleeswaran et. al. (2007)[3]** carried out design and experimental fatigue analysis of composite multi leaf spring using glass fibre reinforced polymer using life data analysis. Compared to steel spring, the composite leaf spring was found to have 67.35 % lesser stress, 64.95 % higher stiffness and 126.98 % higher natural frequency than that of existing steel leaf

spring. The conventional multi leaf spring weight was about 13.5 kg whereas the E-glass/Epoxy multi leaf spring weight was only 4.3 kg. Thus a weight reduction of 68.15 % was achieved. Besides the reduction in weight, the fatigue life of composite leaf spring was predicted to be higher than that of steel leaf spring. Life data analysis was found to be a tool to predict the fatigue life of composite multi leaf spring. It was found that the life of composite leaf spring was much higher than that of a steel leaf spring.

### **3. Taguchi method**

Taguchi method is a record method developed by Taguchi and Konishi.. Taguchi Method involves identification of proper control factors to obtain the optimum results of the process. Orthogonal Arrays (OA) are being used to conduct group of experiments. Outcomes of these experiments are being used to analyze the data and predict the quality of components produced[4].

### **4. Experimental work:**

The framework of proposed methodology of research as shown in Figure (2) the details of the experiment work can be explained in the following which contain all the steps of Taguchi method that used in the research.

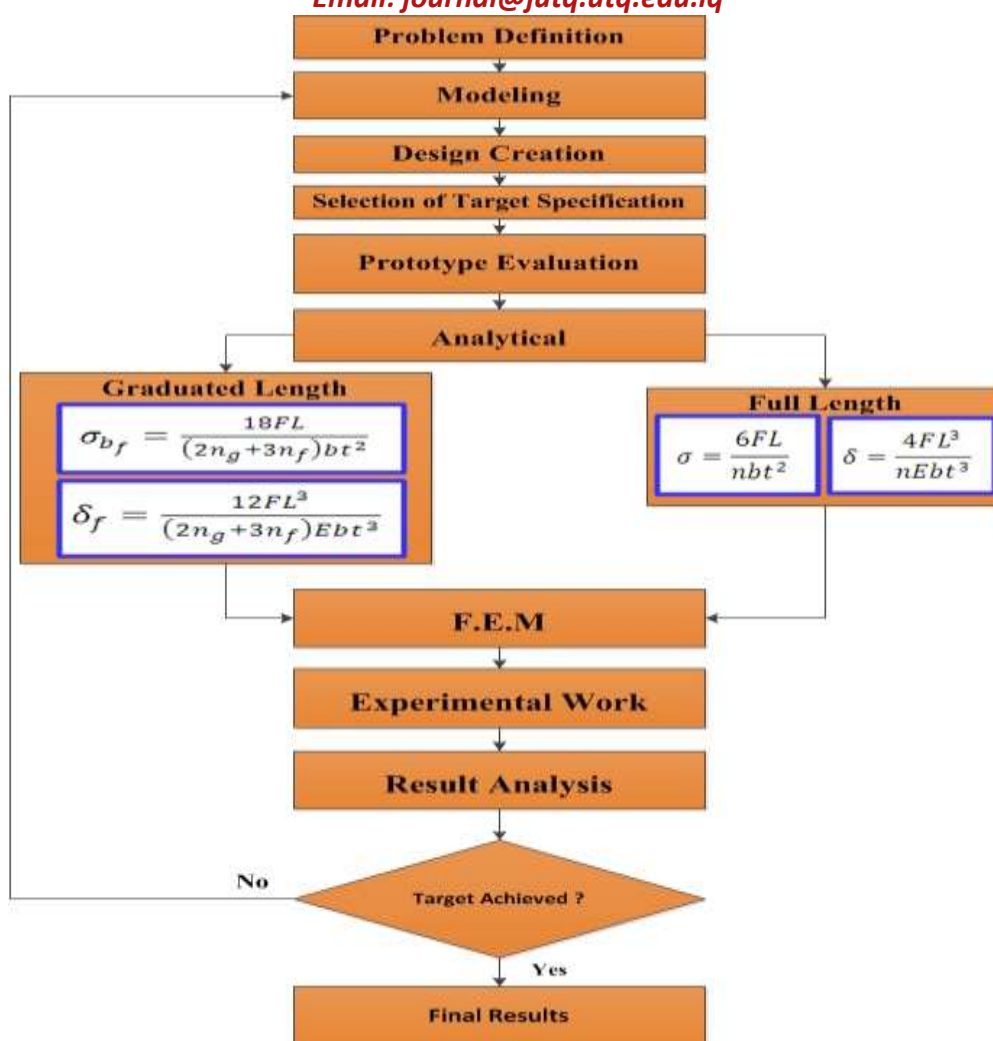


Figure (2) the research methodology

**4.1 Materials:** The total thickness of strips to be studied was (12 mm) with different layers. This thickness was chosen because of the availability of the required thickness of all the needed strips.

- **Chemical composition:** The chemical composition of the material used is shown in table I the commercial code of materials was found by using (key to steel) software. The strips examined steel in several thickness (4, 6, and 12) mm.

Table I Chemical composition of used strips

Component	Thickness of strips		
	4 mm	6 mm	12 mm
% C	0.177	0.176	0.114
% Si	0.167	0.279	0.260
% Mn	0.554	0.490	1.08
% P	0.012	0.022	0.012
% S	0.02	0.018	0.006
% Cr	0.078	0.047	0.028

- **Mechanical properties:** The mechanical properties for the material used are shown in table II .

Table II Mechanical properties of used strips

Mechanical properties	Thickness of strips		
	4 mm	6 mm	12 mm
Yield stress N/mm <sup>2</sup>	325	310	329
Tensile strength N/mm <sup>2</sup>	458	431.6	460
Elongation %	35	38.2	39.2
Reduction in area %	39.8	41.4	42.3

#### 4.2 Design of experiments:

Taguchi method is applied in the design of leaf spring to select the optimal parameters for the resilience. This uses an orthogonal array to study the entire parametric space with a limited number of experiments. The four parameters (control factors) considered in this study are: thickness, length, radius of

curvature and step. All of them were set at four different levels (see Table III). Therefore, an L16 orthogonal array is used (see Table IV)

**Table III Control factors**

<b>a. Array 1</b>			
<b>Levels of factors</b>	<b>Experimental factors</b>		
	<b>Thickness</b>	<b>Length of strips</b>	<b>Step</b>
<b>1</b>	12	300	Full length
<b>2</b>	6	280	Step
<b>3</b>	3	260	
<b>4</b>	1	240	
<b>b. Array 2</b>			
<b>Levels of factors</b>	<b>Experimental factors</b>		
	<b>Thickness</b>	<b>Length of strips</b>	<b>Step</b>
<b>1</b>	12	300	Full length
<b>2</b>	4	280	Step
<b>3</b>	2	260	
<b>4</b>	1	240	

The response variables chosen for the present investigation is deflection. The nominal the best quality characteristic has been used for calculating the signal to noise (S/N) ratio for these responses, see Eq. 1. [16]

QC: Nominal is best (S/N based on MSD)

$$S/N = - 10 \text{ Log (MSD) } \dots\dots\dots (1)$$

Where Y = Results, N = Number of results in a trial, and MSD = Sum of all [(Y - Target) ^2] / N

**Table IV Trial conditions**

<b>a. Array 1</b>			
<b>Trial Condition 1</b>			
	T/ thickness of strips (mm)	12 mm	1
	L/length of layer	300	1



	S/step	step	1
<b>Trial Condition 2</b>			
	T/ thickness of strips (mm)	12 mm	1
	L/length of layer	280	2
	S/step	Step	2
<b>Trial Condition 3</b>			
	T/ thickness of strips (mm)	12 mm	1
	L/length of layer	260	3
	S/step	Full length	3
<b>Trial Condition 4</b>			
	T/ thickness of strips (mm)	12 mm	1
	L/length of layer	260	4
	S/step	full	4
<b>Trial Condition 5</b>			
	T/ thickness of strips (mm)	6 mm	2
	L/length of layer	300	1
	S/step	Step	3
<b>Trial Condition 6</b>			
	T/ thickness of strips (mm)	6 mm	2
	L/length of layer	280	2
	S/step	Step	4
<b>Trial Condition 7</b>			
	T/ thickness of strips (mm)	6 mm	2
	L/length of layer	260	3
	S/step	Full length	1
<b>Trial Condition 8</b>			
	T/ thickness of strips (mm)	6 mm	2
	L/length of layer	260	4
	S/step	Full length	2
<b>Trial Condition 9</b>			
	T/ thickness of strips (mm)	3 mm	3
	L/length of layer	300	1
	S/step	Full length	4
<b>Trial Condition 10</b>			
	T/ thickness of strips (mm)	3 mm	3
	L/length of layer	280	2
	S/step	Full length	3
<b>Trial Condition 11</b>			
	T/ thickness of strips (mm)	3 mm	3
	L/length of layer	260	3
	S/step	Step	2
<b>Trial Condition 12</b>			
	T/ thickness of strips (mm)	3 mm	3

	L/length of layer	260	4
	S/step	step	1
<b>Trial Condition 13</b>			
	T/ thickness of strips (mm)	1 mm	4
	L/length of layer	300	1
	S/step	Full length	2
<b>Trial Condition 14</b>			
	T/ thickness of strips (mm)	1 mm	4
	L/length of layer	280	2
	S/step	Full length	1
<b>Trial Condition 15</b>			
	T/ thickness of strips (mm)	1 mm	4
	L/length of layer	260	3
	S/step	step	4
<b>Trial Condition 16</b>			
	T/ thickness of strips (mm)	1 mm	4
	L/length of layer	260	4
	S/step	Step	3
<b>b. Array 2</b>			
<b>Trial Condition 1</b>			
	T/ thickness of strips (mm)	12 mm	1
	L/length of layer	300	1
	S/step	step	1
<b>Trial Condition 2</b>			
	T/ thickness of strips (mm)	12 mm	1
	L/length of layer	280	2
	S/step	Step	2
<b>Trial Condition 3</b>			
	T/ thickness of strips (mm)	12 mm	1
	L/length of layer	260	3
	S/step	Full	3
<b>Trial Condition 4</b>			
	T/ thickness of strips (mm)	12 mm	1
	L/length of layer	260	4
	S/step	Full	4
<b>Trial Condition 5</b>			
	T/ thickness of strips (mm)	4 mm	2
	L/length of layer	300	1
	S/step	Step	3
<b>Trial Condition 6</b>			
	T/ thickness of strips (mm)	4 mm	2
	L/length of layer	280	2
	S/step	Step	4

<b>Trial Condition 7</b>			
	T/ thickness of strips (mm)	4 mm	2
	L/length of layer	260	3
	S/step	Full length	1
<b>Trial Condition 8</b>			
	T/ thickness of strips (mm)	4 mm	2
	L/length of layer	260	4
	S/step	Full	2
<b>Trial Condition 9</b>			
	T/ thickness of strips (mm)	2 mm	3
	L/length of layer	300	1
	S/step	Full	4
<b>Trial Condition 10</b>			
	T/ thickness of strips (mm)	2 mm	3
	L/length of layer	280	2
	S/step	Full	3
<b>Trial Condition 11</b>			
	T/ thickness of strips (mm)	2 mm	3
	L/length of layer	260	3
	S/step	Step	2
<b>Trial Condition 12</b>			
	T/ thickness of strips (mm)	2 mm	3
	L/length of layer	260	4
	S/step	Step	1
<b>Trial Condition 13</b>			
	T/ thickness of strips (mm)	1 mm	4
	L/length of layer	300	1
	S/step	Full	2
<b>Trial Condition 14</b>			
	T/ thickness of strips (mm)	1 mm	4
	L/length of layer	280	2
	S/step	Full	1
<b>Trial Condition 15</b>			
	T/ thickness of strips (mm)	1 mm	4
	L/length of layer	260	3
	S/step	Step	4
<b>Trial Condition 16</b>			
	T/ thickness of strips (mm)	1 mm	4
	L/length of layer	260	4
	S/step	Step	3

## 5. Results and Discussions:

Q4W software used to analysis the results. Depending on the results in table (V) the S/N ratio can be determined. The S/N ratio for the nominal is the best quality characteristic used in this study and is calculated by equation (1): The results illustrated in table (VI)

Table (V) a. The Response of experiment for Array 1.

Trail	Inner array L16			Load	Stress	Response				Mean
1	1	1	1	280	140	4.024	5.027	4.481	4.894	4.606
2	1	2	1	300	140	3.572	4.578	3.932	4.072	4.038
3	1	3	2	320	140	3.089	4.135	3.579	3.899	3.675
4	1	4	2	350	140	2.767	3.773	3.027	3.567	3.283
5	2	1	1	130	140	6.968	7.974	7.428	7.888	7.564
6	2	2	1	140	140	6.167	7.173	6.547	7.037	6.73
7	2	3	2	152	140	5.555	6.501	5.835	6.215	6.026
8	2	4	2	166	140	4.799	5.745	4.999	5.669	5.303
9	3	1	2	63	140	14.176	15.282	14.736	14.946	14.78
10	3	2	2	68	140	12.582	13.585	13.039	13.382	13.14
11	3	3	1	74	140	10.136	11.032	10.406	10.806	10.59
12	3	4	1	80	140	8.714	9.61	8.944	9.484	9.188
13	4	1	2	23	140	51.084	51.93	51.184	51.754	51.48
14	4	2	2	24	140	43.861	44.417	43.871	44.421	44.14
15	4	3	1	25	140	28.716	29.272	28.646	29.516	29.03
16	4	4	1	26	140	23.305	24.421	23.755	24.115	23.899

Table (V) b. The Response of experiment for Array 2.

Trail	Inner array L16			Load	Stress	Response				Mean
1	1	1	1	280	140	4.024	5.027	4.481	4.894	4.606
2	1	2	1	300	140	3.572	4.578	3.932	4.072	4.038
3	1	3	2	320	140	3.089	4.135	3.579	3.899	3.675
4	1	4	2	350	140	2.767	3.773	3.027	3.567	3.283
5	2	1	1	85	140	10.499	11.505	10.959	11.419	11.09
6	2	2	1	92	140	9.298	10.304	9.678	10.168	9.862
7	2	3	2	100	140	7.827	8.773	8.107	8.487	8.298
8	2	4	2	109	140	6.791	7.737	6.991	7.661	7.295
9	3	1	2	42	140	18.886	19.992	19.446	19.656	19.495
10	3	2	2	45	140	16.64	17.643	17.097	17.44	17.205
11	3	3	1	50	140	17.5	18.396	17.77	18.17	17.959
12	3	4	1	54	140	14.927	15.823	15.157	15.697	15.401
13	4	1	2	22	140	51.084	51.93	51.184	51.754	51.48
14	4	2	2	24	140	43.861	44.417	43.871	44.421	44.14
15	4	3	1	25	140	28.716	29.272	28.646	29.516	29.03
16	4	4	1	26	140	23.305	24.421	23.755	24.115	23.899

➤ **Apply Q4W program to obtain the following objectives:**

Software for Taguchi design of experiments “Qualitek-4, automatically designs experiments based on user-indicated factors and levels. The program selects the array and assigns the factors to the appropriate column. For more complex experiments, there is a manual design option. The program also performs the three basic steps in analysis: main effect, analysis-of-variance, and optimum studies. Analysis can be performed using standard or signal-to-noise ratios of results for

***University of Thi-Qar Journal Vol.12 No.3 SEP 2017***

***Web Site: <https://jutq.utq.edu.iq/index.php/main>***

***Email: [journal@jutq.utq.edu.iq](mailto:journal@jutq.utq.edu.iq)***

smaller, bigger, nominal, or dynamic characteristics. The results can be displayed using pie charts, bar graphs, or trial-data-range graphs.

**5.1 Design leaf spring with high load and small deflection:**

**The target is :( load = 160 N)**

**5.1.1 Results Analysis of Leaf Spring:**

The result analysis of leaf spring includes two stages as follows:

- Stage (1) calculates the S/N ratio for each experimental design point. Depending on the results in table (V) the S/N ratio can be determined. The S/N ratio for the nominal is the best quality characteristic used in this study which calculated by equation 1.

For all rows in table (V) a the S/N ratio can compute by using equation 1.

$$S/N = - 10 \text{ Log (MSD)} = -41.656$$

The same calculation procedure is repeated for unit 1 to unit 16 above. The results illustrated in table VI

Table VI S/N ratio for experimental trials-case160 N

<b>Trial no.</b>	<b>S/N</b>
1	-41.656
2	-42.985
3	-44.137
4	-45.621
5	-29.252
6	-25.584
7	-16.961
8	-16.961
9	-39.646
10	-39.182
11	-38.589
12	-37.954
13	-42.671

14	-42.607
15	-42.543
16	-42.478

After obtaining the average

the S/N values performance of

each factor at each level was calculated. The results are tabulated below against the symbols T to S representing Factor 1 to 3 respectively. Table VII represents the average at each level. The average S/N value of each factor is plotted; Graphical representations can make data easy to interpret by just looking at graphs. The main-effects of chart are a plot of average responses at different levels of a factor versus the factor levels. The main-effect plots are shown in Fig.3. In the plots, the x-axis indicates the value of each process parameter at two levels and y-axis indicates the response value. Horizontal line indicates the mean value of the response.

Table VII Average S/N table for factors-case 160 N

Level	Thickness	Length	Step
1	-43.6	-38.306	-37.077
2	-22.189	-37.589	-38.183
3	-38.843	-35.558	
4	-42.575	-35.838	

Then analysis of variance is calculated for factors.

Using Q4W software ANOVA is computed for S/N for all factors. Table VIII explains it.



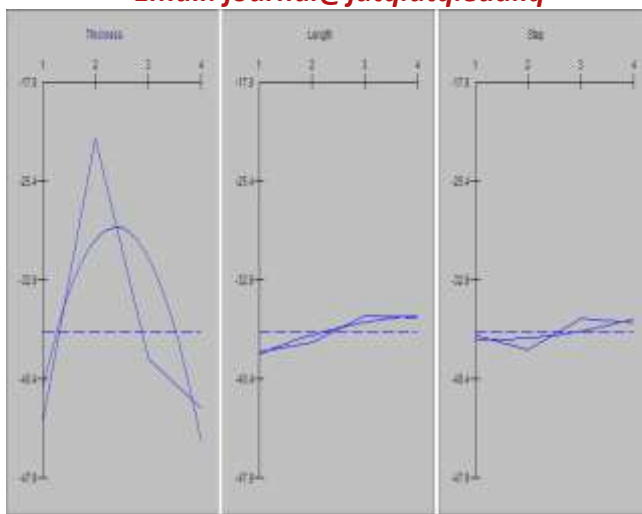


Fig .3. Main effects plot for S/N ratios-case 160 N

Table VIII ANOVA for S/N

Source	DF	Seq SS	Adj MS	F	P
Thickness	3	1188.9	396.	26.2	86.959
Length	3	22.126	7.375	0.488	0
Step	1	13.571	4.523	0.299	0
Residual Error	6	90.536	15.089		13.041
Total	15	1315.148			100%

In Taguchi experimental analysis, percentage contributions are often used to evaluate the relative importance of each effect. The latest column in table VIII represents the percentage contribution of factors calculated by using the equation below. The percentage contribution of X =  $SS_x/SS_T$

The percentage contribution of control factor is represented in Fig.4.

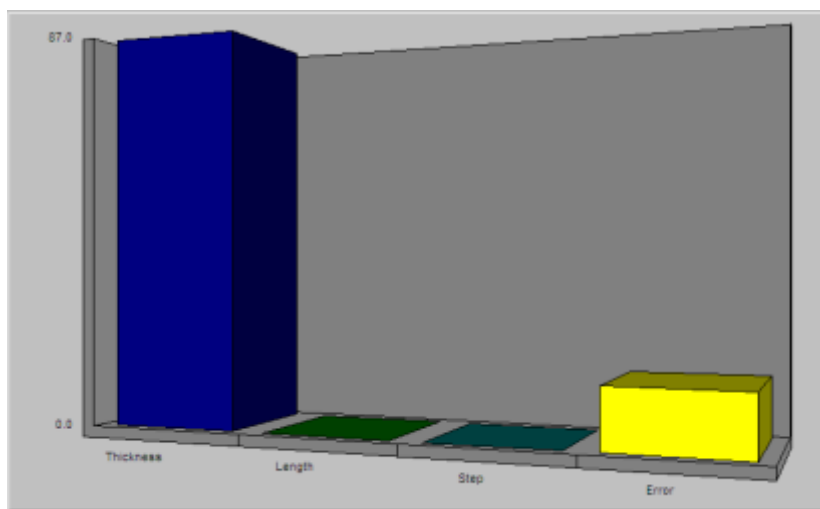


Fig.4. Percentage contribution of S/N.- case 160 N

The results data of ANOVA in table VIII are represented as shown in Fig.3 the most significant factor is T (thickness).

The optimum conditions for this target:

- Thickness (T): 6 mm
- Length (L): 260 mm
- Step (S): step

### **5.2 Design leaf spring with small load and high deflection:**

**The target is :( load = 40 N)**

The optimum conditions for this target:

- Thickness (T): 2 mm
- Length (L): 260 mm
- Step (S): step

### **5.3 Design leaf spring with medium load and medium deflection:**

**The target is :( load = 100 N)**

The optimum conditions for this target:

**a. Three layers :**

- Thickness (T): 4 mm

- Length (L): 240 mm
- Step (S): step

b. **Four layers** :

- Thickness (T): 3 mm
- Length (L): 280 mm
- Step (S): step

## **6. Conclusions:**

- 1- The results of force, stress and bend obtained from the mathematical model equations show that there is a limitation of these equations to cover all the cases of study in this research compared with results obtained by F.E.M.
- 2- There is a good compatibility between experimental results and results obtained by (F.E.M) for the graduated leaf spring.
- 3- All results show an increase in deflection amount with plate number increase in total group equal to major beam thickness and decrease in the amount of load which can be applied at constant bending stress.

No.	Thickness (mm)	No. of layers	Stress (Mpa)	Load (N)	Deflection (mm)
1	12	1	140	280	4.60
2	6	2	140	130	7.56
3	3	4	140	63	14.78
4	1	12	140	23	51.48

- 4- The results show possibility of increasing deflection with decreasing applied load which is convenient for the vehicle and transporting automobiles when they use herringbone ways.

No.	Thickness(mm)	Length(mm)	Step	Deflection(mm)	Load(N)
1	3	260	step	9.18	80
2	4	260	Step	7.29	109

- 5- There is a possibility of lowering deflection amount accompanied by increase in the carrying load for a heavy vehicle which works on high ways.

No.	Thickness(mm)	Length(mm)	Step	Deflection(mm)	Load(N)
1	6	260	step	6.02	152

6- The thickness of leave is the dominant parameter in design of leaf spring followed by the length and step.

**Reference: -**

1. Khurmi, R. and J. Gupta, *Machine design*. 2005: S. Chand.
2. Kassie, A.A., R.R. Kumar, and A. Rao, *DESIGN OF SINGLE COMPOSITE LEAF SPRING FOR LIGHT WEIGHT VEHICLE*. 2014.
3. Kumar, M.S. and S. Vijayarangan, *Analytical and experimental studies on fatigue life prediction of steel and composite multi-leaf spring for light passenger vehicles using life data analysis*. *Materials science*, 2007. **13**(2): p. 141-146.
4. Yang, K. and B.S. El-Haik, *Design for six sigma*. 2003: McGraw-Hill New York.